

How to change: VW Golf 5 engine oil and filter – replacement guide





 VIDEO TUTORIAL

Important!

This replacement procedure can be used for:
VW CADDY III Box (2KA, 2KH, 2CA, 2CH) 1.6, VW CADDY III Estate (2KB, 2KJ, 2CB, 2CJ) 1.6, VW GOLF V (1K1) 1.6, VW JETTA III (1K2) 1.6, VW TOURAN (1T1, 1T2) 1.6

The steps may slightly vary depending on the car design.

REPLACEMENT: ENGINE OIL AND FILTER – VW GOLF 5. TOOLS YOU MIGHT NEED:



- Wire brush
- All-purpose cleaning spray
- Oil filter cup socket 76-14F
- Drive socket # 12
- Drive socket # 19
- Ratchet wrench
- Torque wrench
- Oil drain pan
- Funnel
- Fender cover

Replacement: engine oil and filter – VW Golf 5. AUTODOC experts recommend:

- Replace the oil filter every time when changing motor oil.
- Wear gloves to prevent contact with hot liquid.
- Please note: all work on the car – VW Golf 5 – should be done with the engine switched off.

CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:

1



Open the hood.

2



Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

3



Unscrew the oil filler plug.

4



Lift the car using a jack or place it over an inspection pit.

Replacement: engine oil and filter – VW Golf 5. AUTODOC recommends:

- The vehicle must be on even keel, and if it is at an angle, the drain plug must be at the lowest point.
- All work should be done with the engine stopped.

5



Undo the fasteners of the oil pan lower cover. Use a drive socket #12.

6



Remove the oil pan cover.

7



Put a waste oil container with at least 5 l capacity under the drainage hole.

8




Clean the area of the oil pan drainage hole. Use a wire brush. Use all-purpose cleaning spray.

9



Unscrew the drain plug. Use a drive socket #19. Use a ratchet wrench.

10

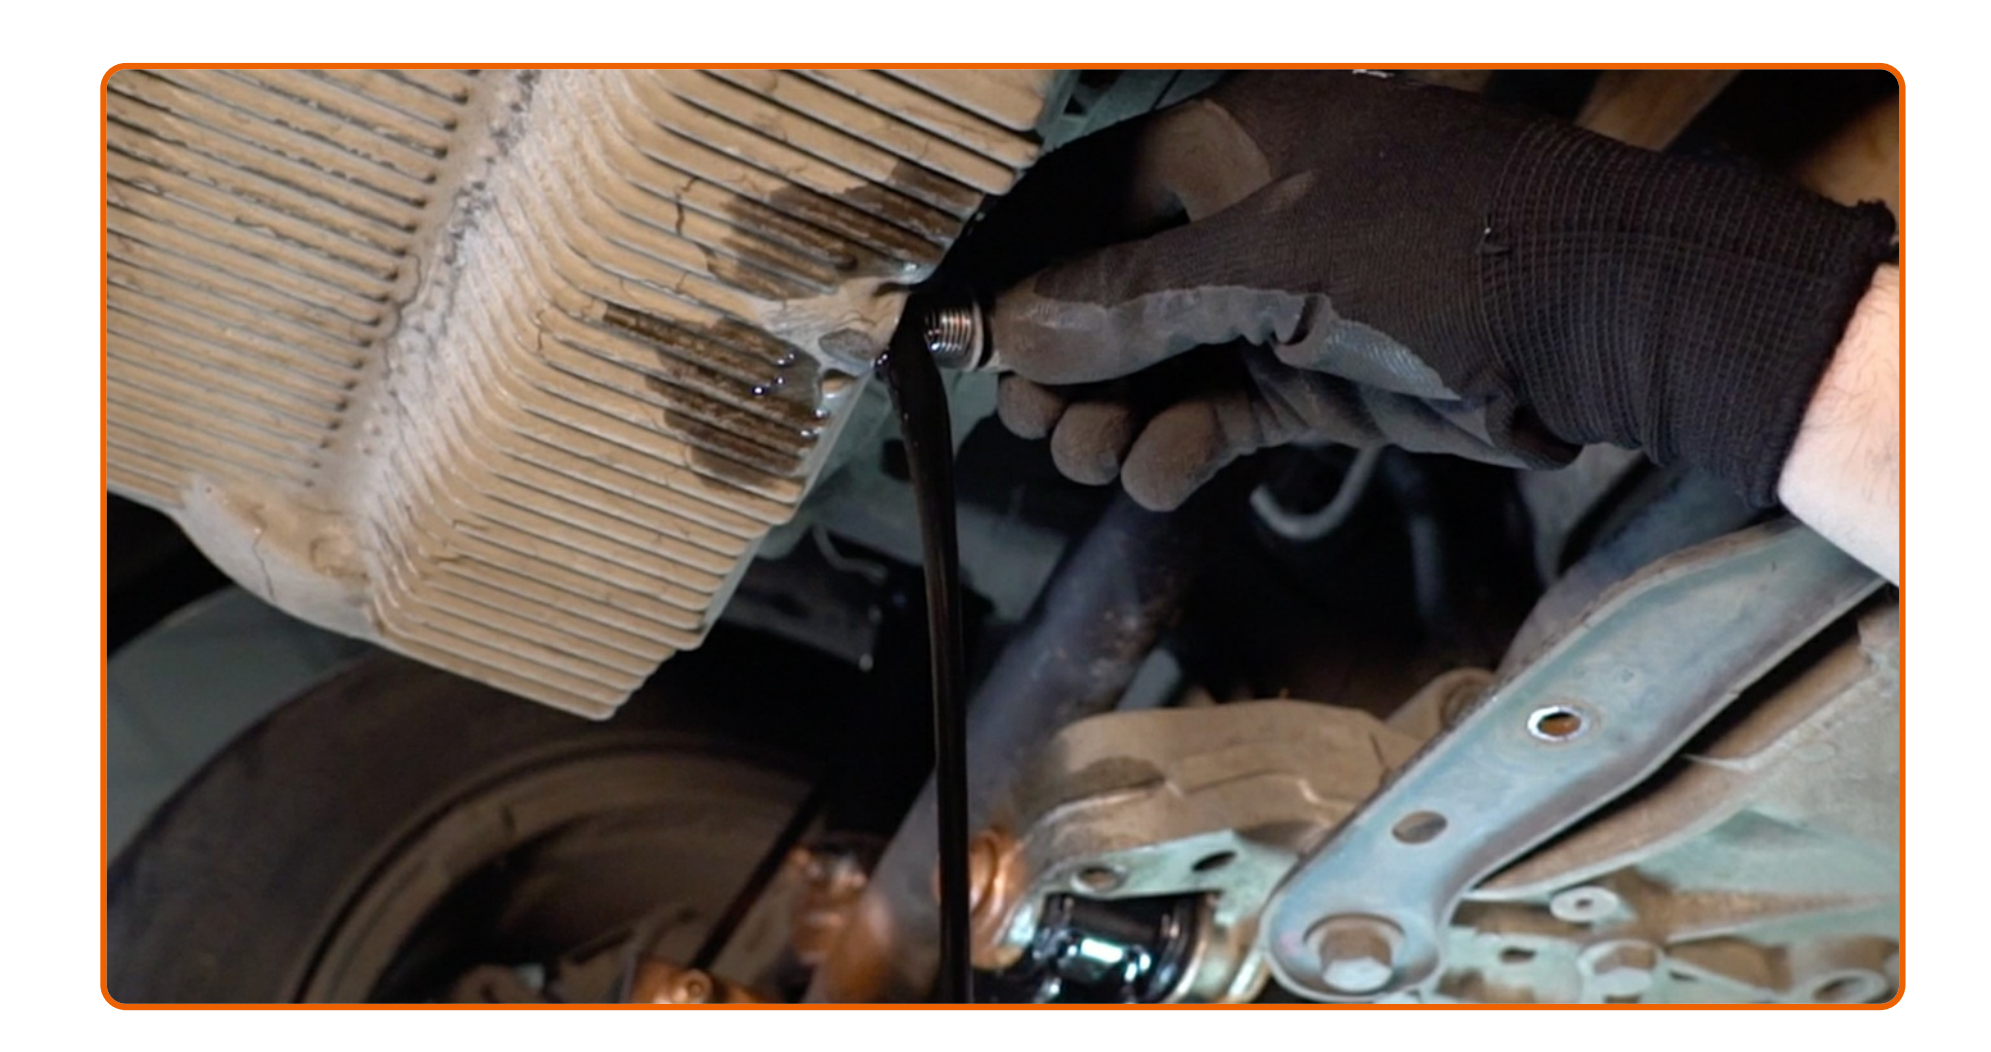

Drain the used oil.

Replacement: engine oil and filter – VW Golf 5. AUTODOC experts recommend:


- Caution! The oil may be hot.

11



Clean the oil filter seat. Use all-purpose cleaning spray.

12

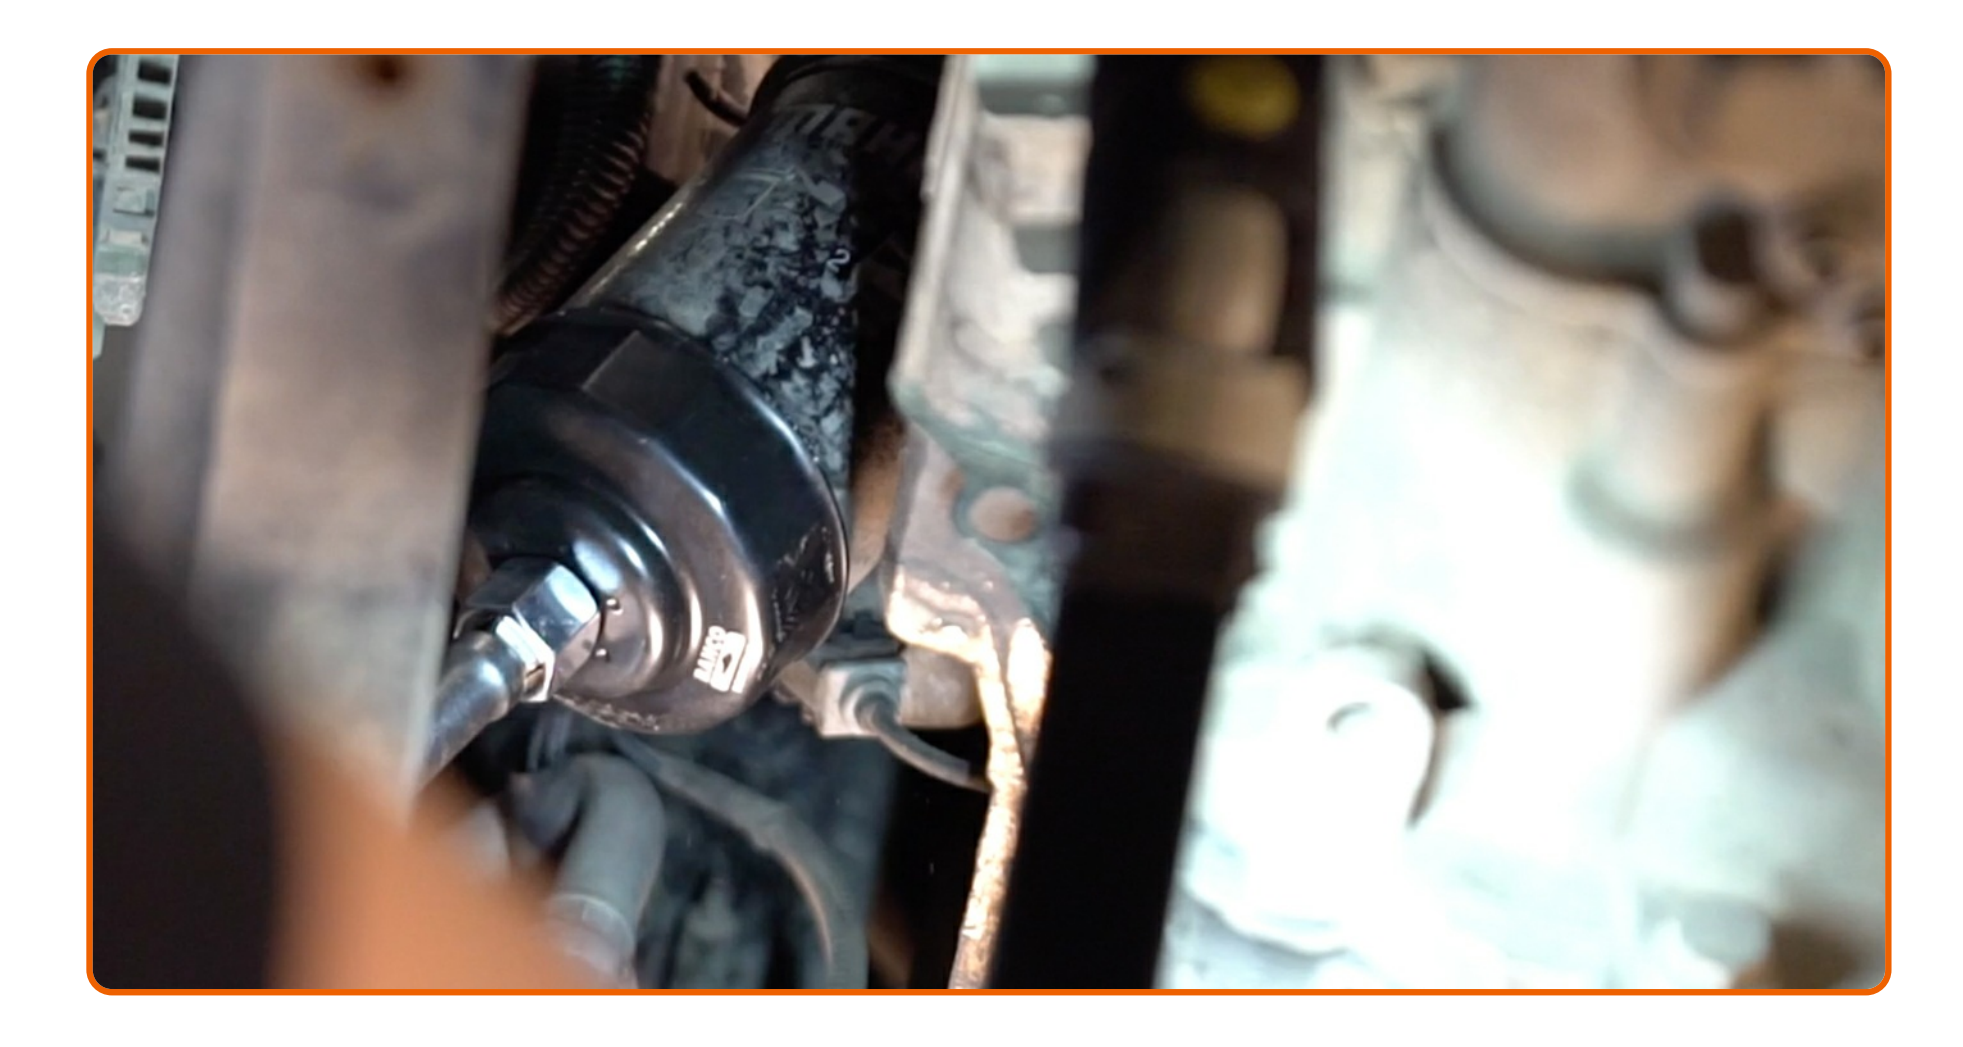

Unscrew the oil filter. Use the 76-14F socket. Use a ratchet wrench.

13




Put the old oil filter in the container.

Replacement: engine oil and filter – VW Golf 5. Tip:

- Move up the container. The oil starts to drain out of the drainage hole immediately after you have removed the oil filter.

14

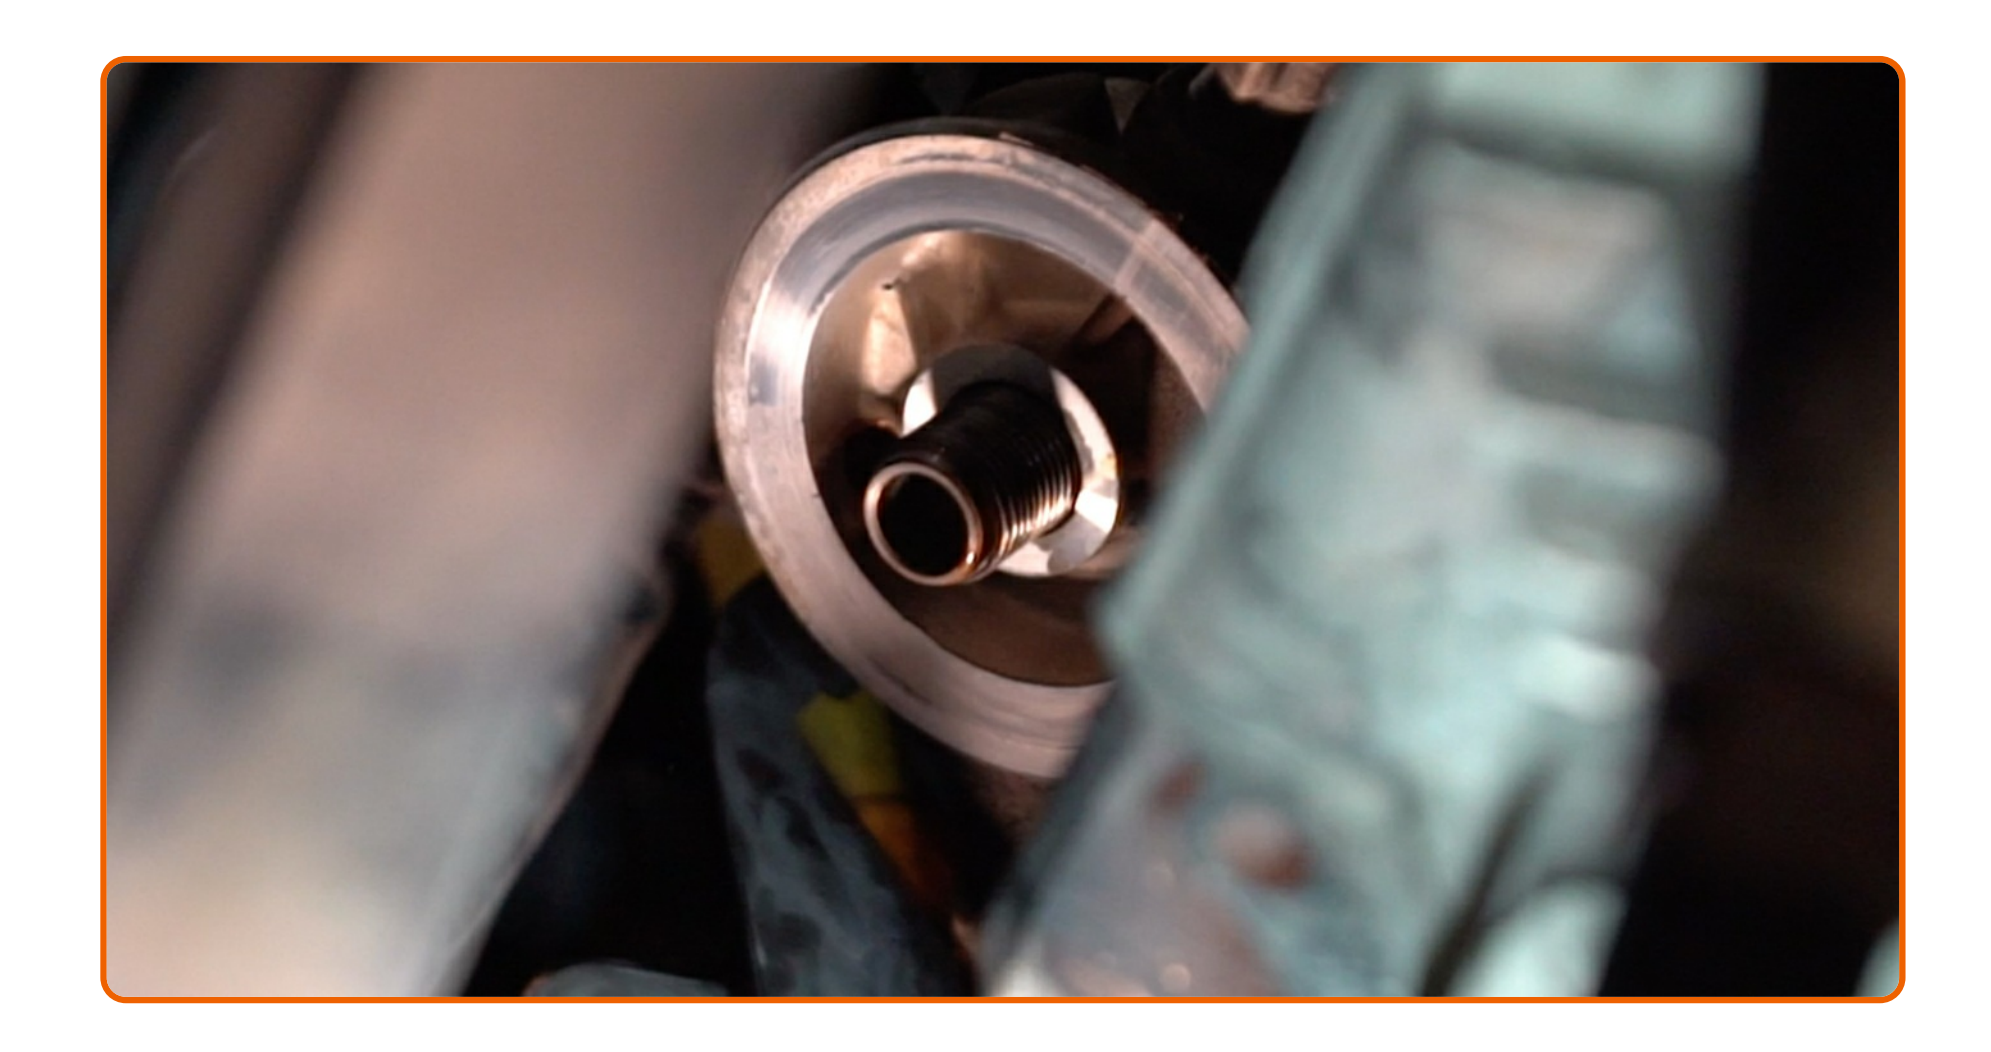

Clean the oil filter seat.

15



Lubricate the rubber seal of the new filter with a little amount of fresh oil.

16




Screw the new filter into its place. Use the 76-14F socket. Use a torque wrench. Tighten it to 18 Nm torque.

Replacement: engine oil and filter – VW Golf 5. Professionals recommend:

- Wait until the oil has completely drained from the drainage hole.

17

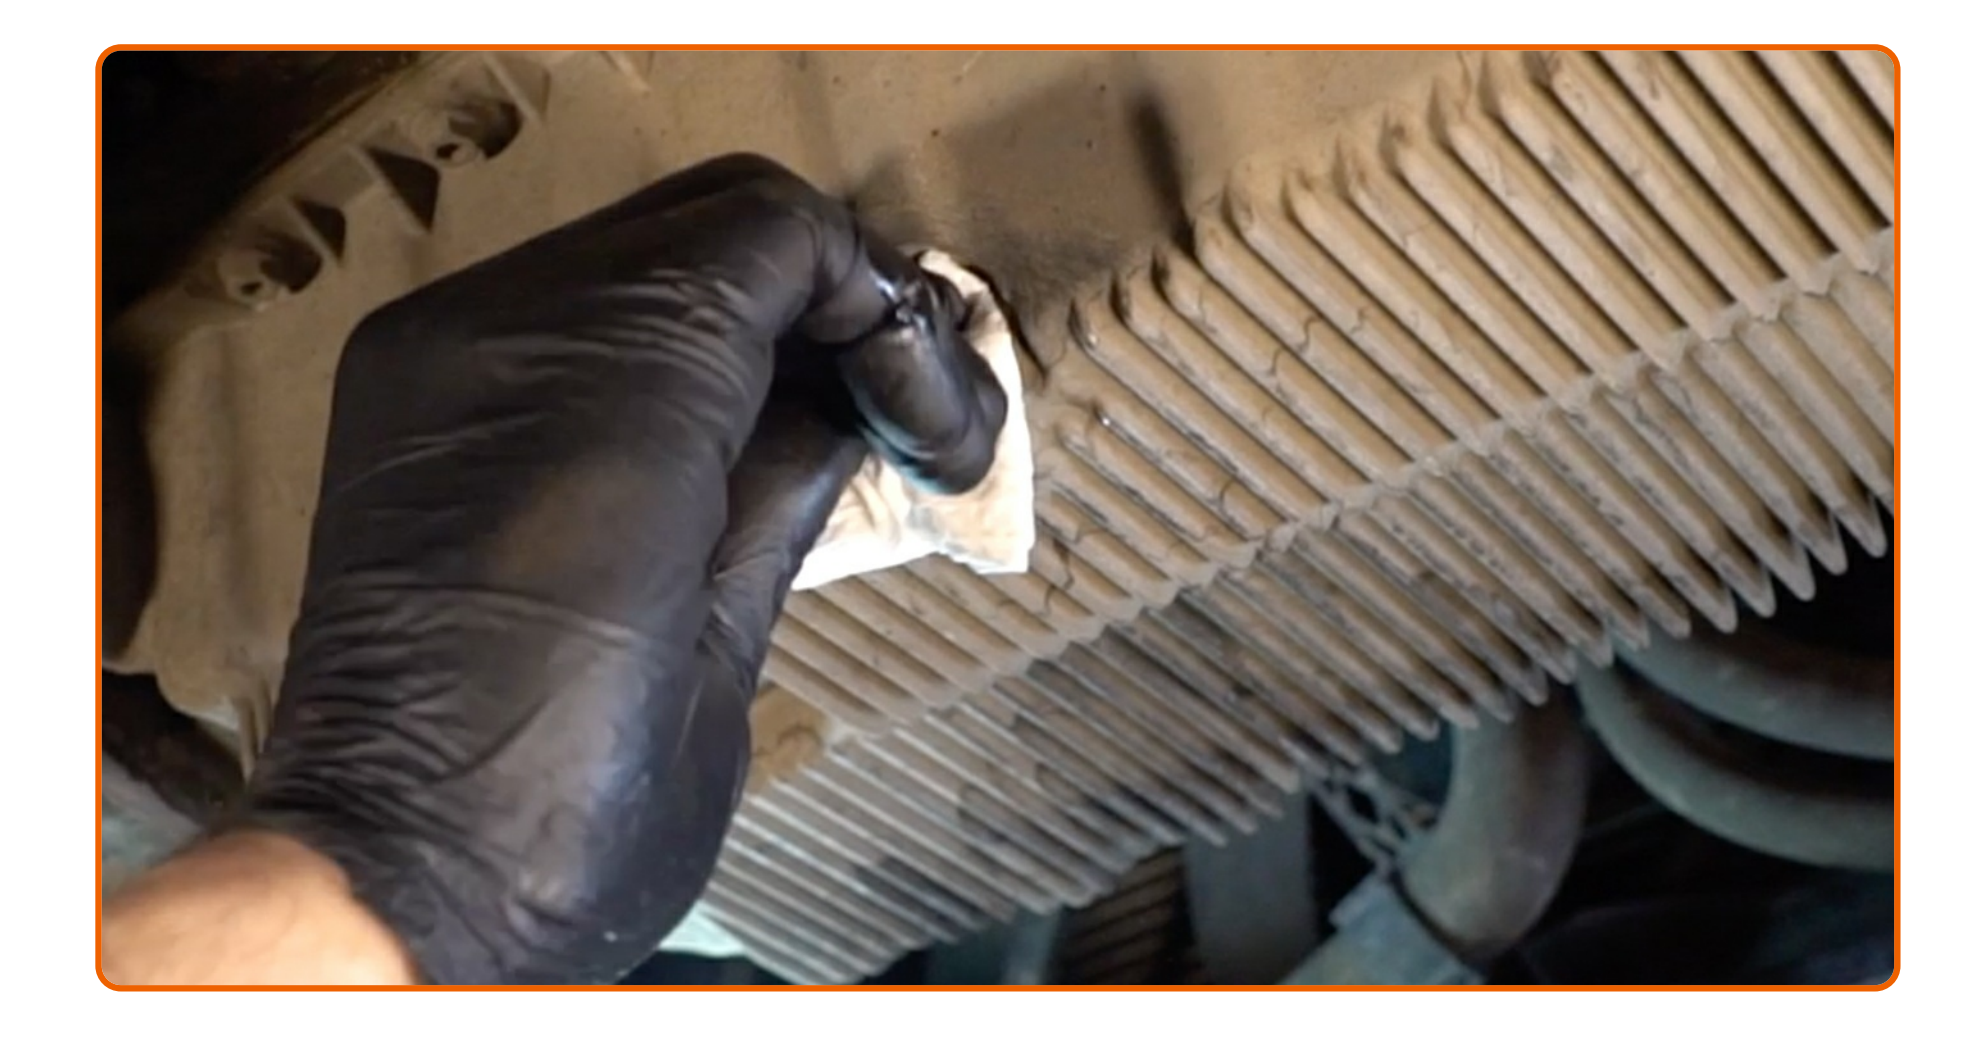

Clean the area of the oil pan drainage hole.


18



Screw in the new drainage plug and tighten it. Use a drive socket #19. Use a torque wrench. Tighten it to 27 Nm torque.



19

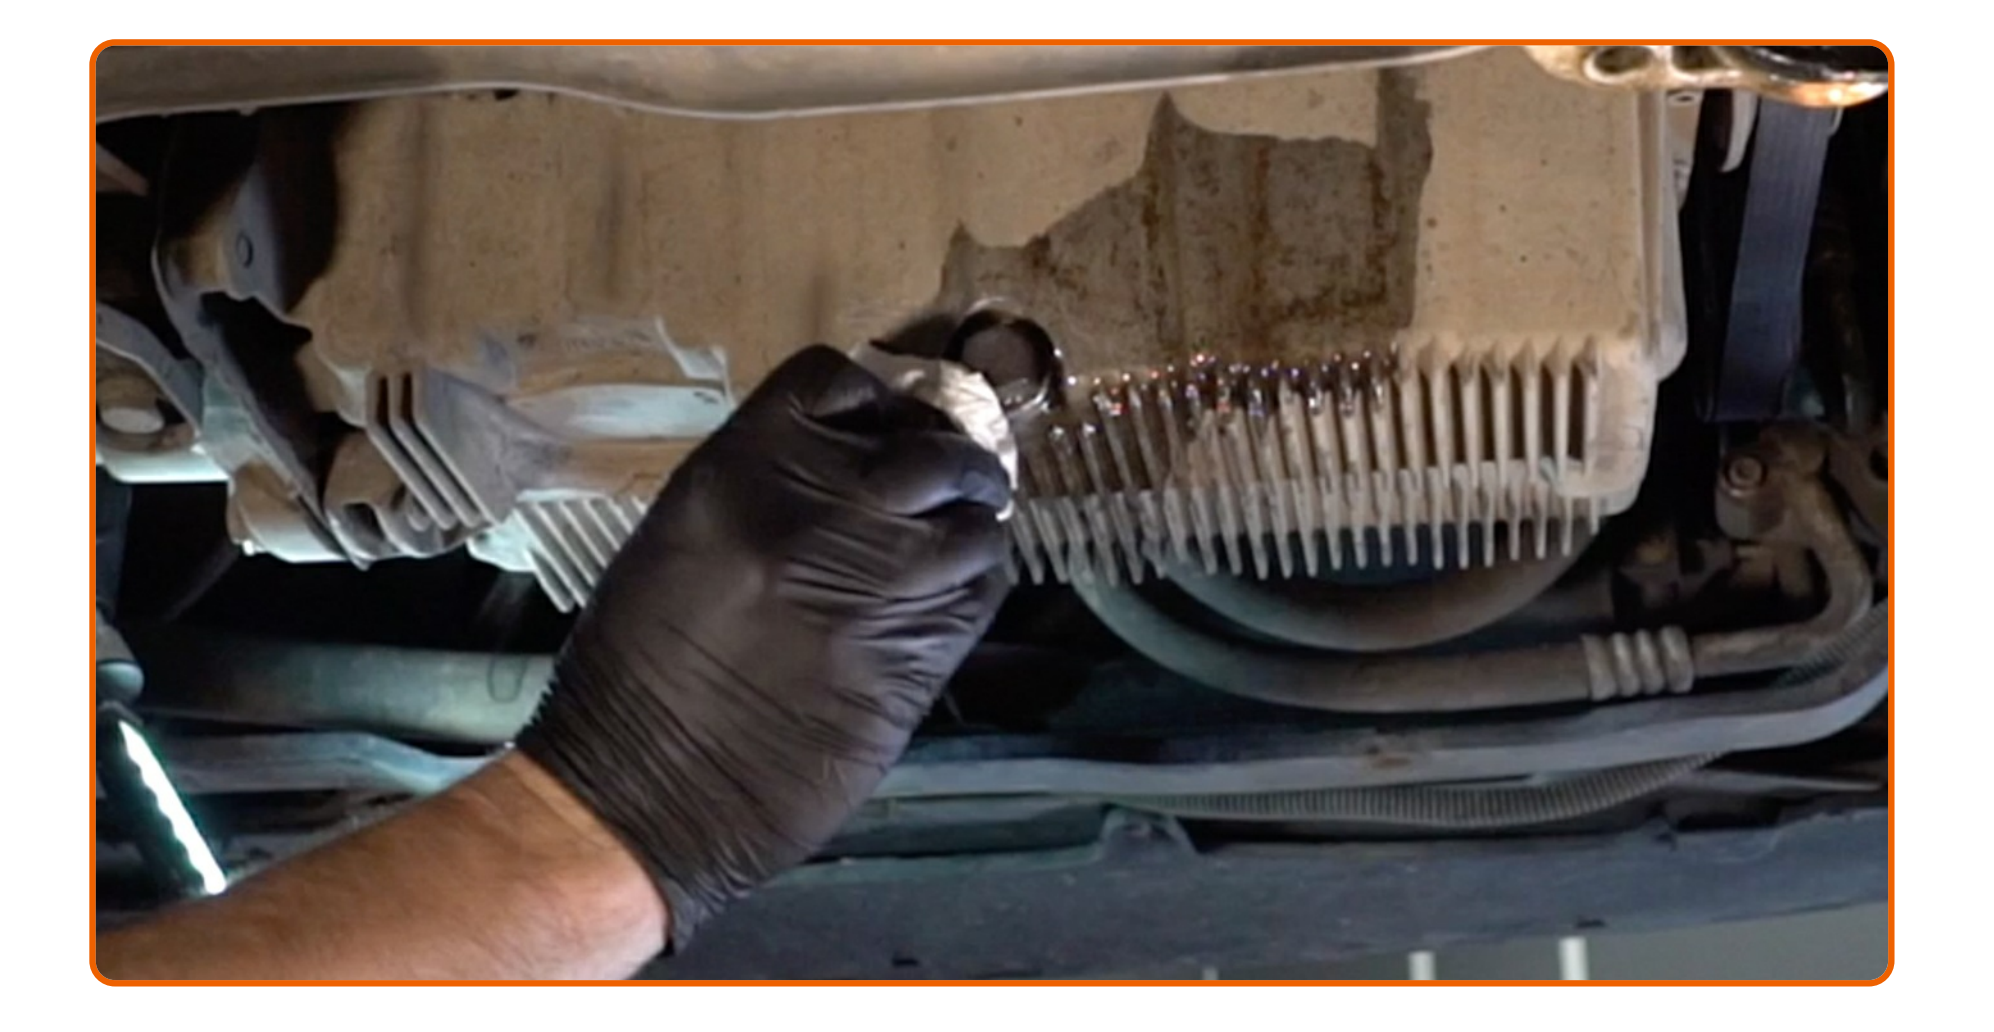

Clean the area of the oil pan drainage hole. Use all-purpose cleaning spray.

20



Reinstall the oil pan lower cover.

21

Tighten the fasteners of the oil pan lower cover. Use a drive socket #12. Use a ratchet wrench.

22



Lower the car.

23



Remove the oil filler cap.

24



Insert the funnel.

25



Pour oil into the engine through the filler. Required amount of oil: 4 l.

Replacement: engine oil and filter – VW Golf 5. Tip from AUTODOC experts:

- Use the oil recommended by the manufacturer.

26



Check the oil level using the dipstick. Top up oil if necessary.

Please note!

- The oil level should be between the Min and Max marks.

27



Tighten the oil filler cap.

28



Run the engine for a few minutes. After the oil pressure warning light goes out, stop the engine.

29




Check the oil level 5 minutes after the stop of the engine operation using a dipstick and add oil if necessary.

Please note!

- The oil level should be between the Min and Max marks.
- Make sure that the oil filler cap is properly tightened.
- Check the threaded plug of the drainage hole and the oil filter seal for tightness. If necessary, carefully tighten them up.

30

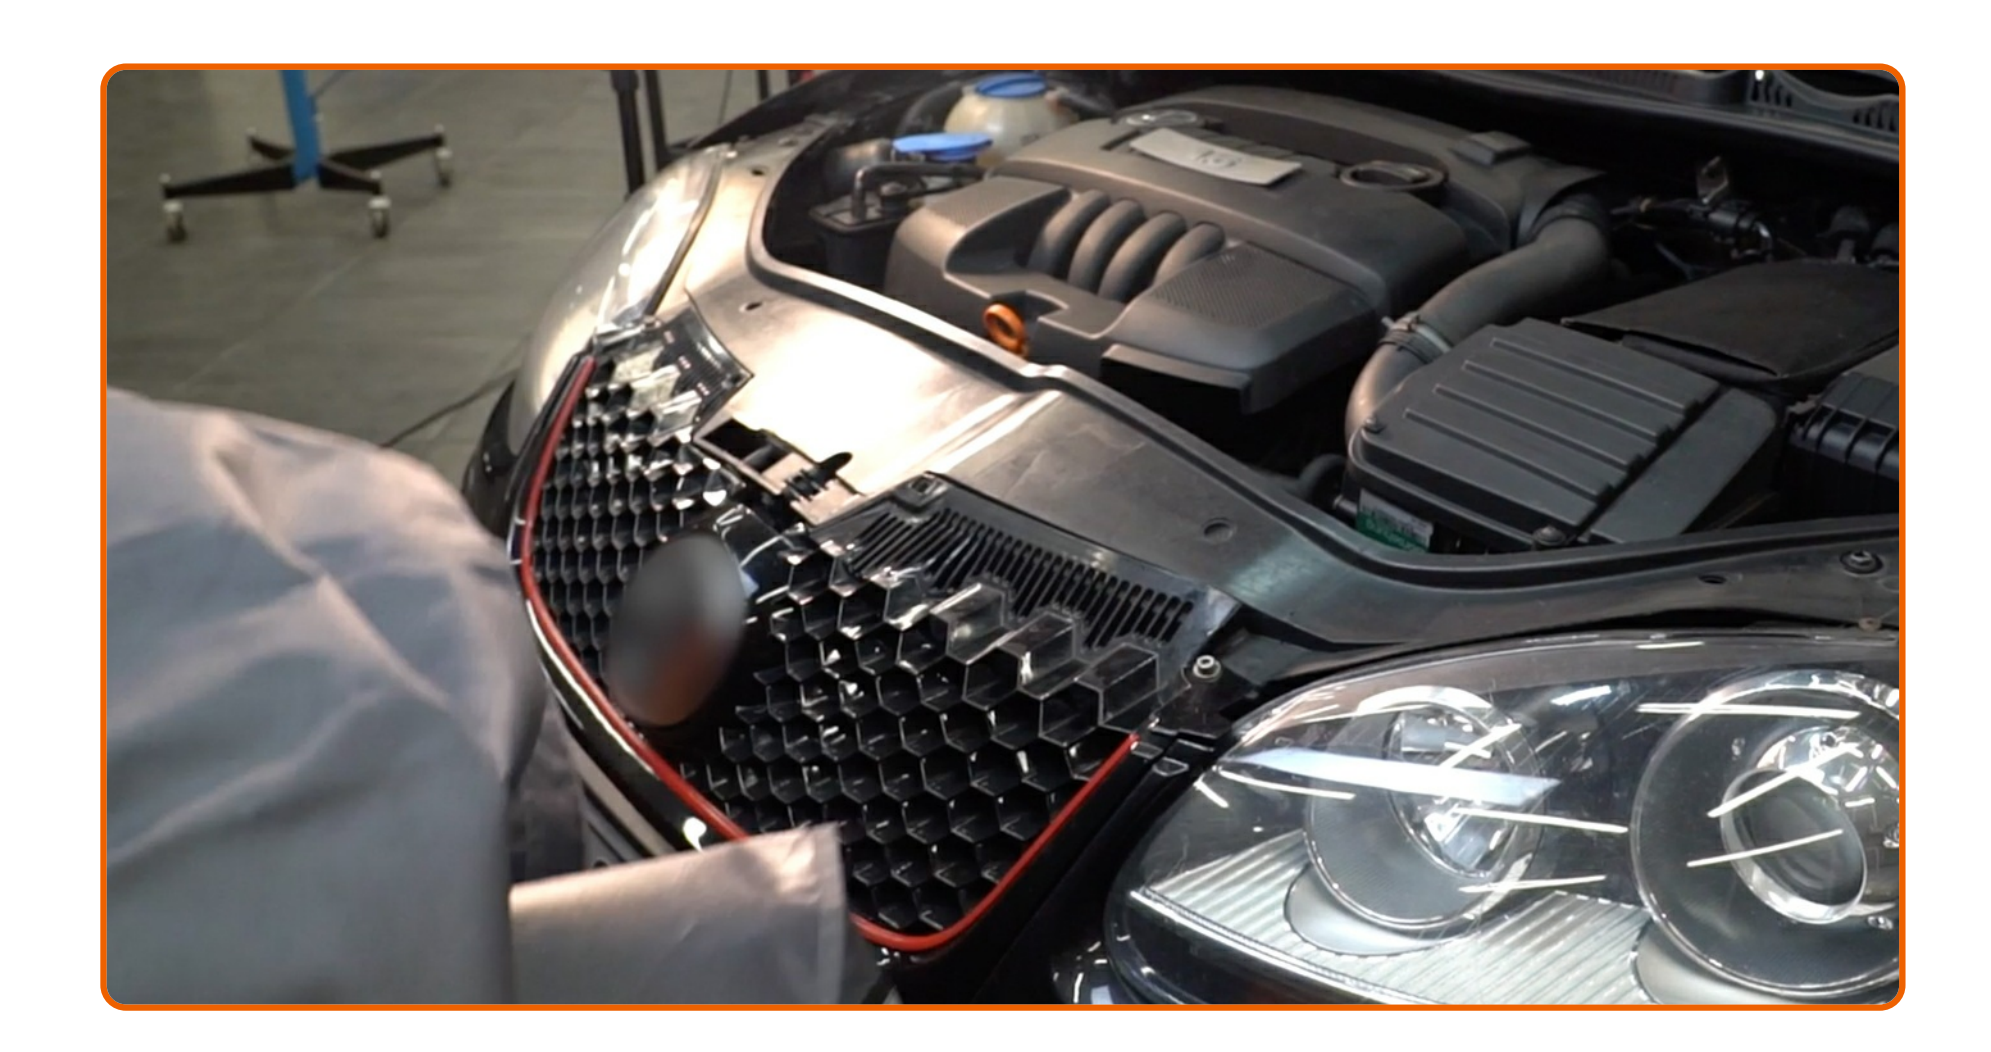

Remove the fender protection cover.

31



Close the hood.

Replacement: engine oil and filter – VW Golf 5. Tip from AUTODOC:

- Note that oil pressure warning light, which indicates insufficient pressure in the lubrication system, may be on for a longer time than usual. After a few seconds, the oil will fill all the channels, and the light will go out.
- To protect the environment from pollution, be sure to dispose of the used filters at special collection points.

DID YOU FIND THESE INSTRUCTIONS HELPFUL?

YES NO




BECOME A MEMBER OF AUTODOC CLUB!



AUTODOC — TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING

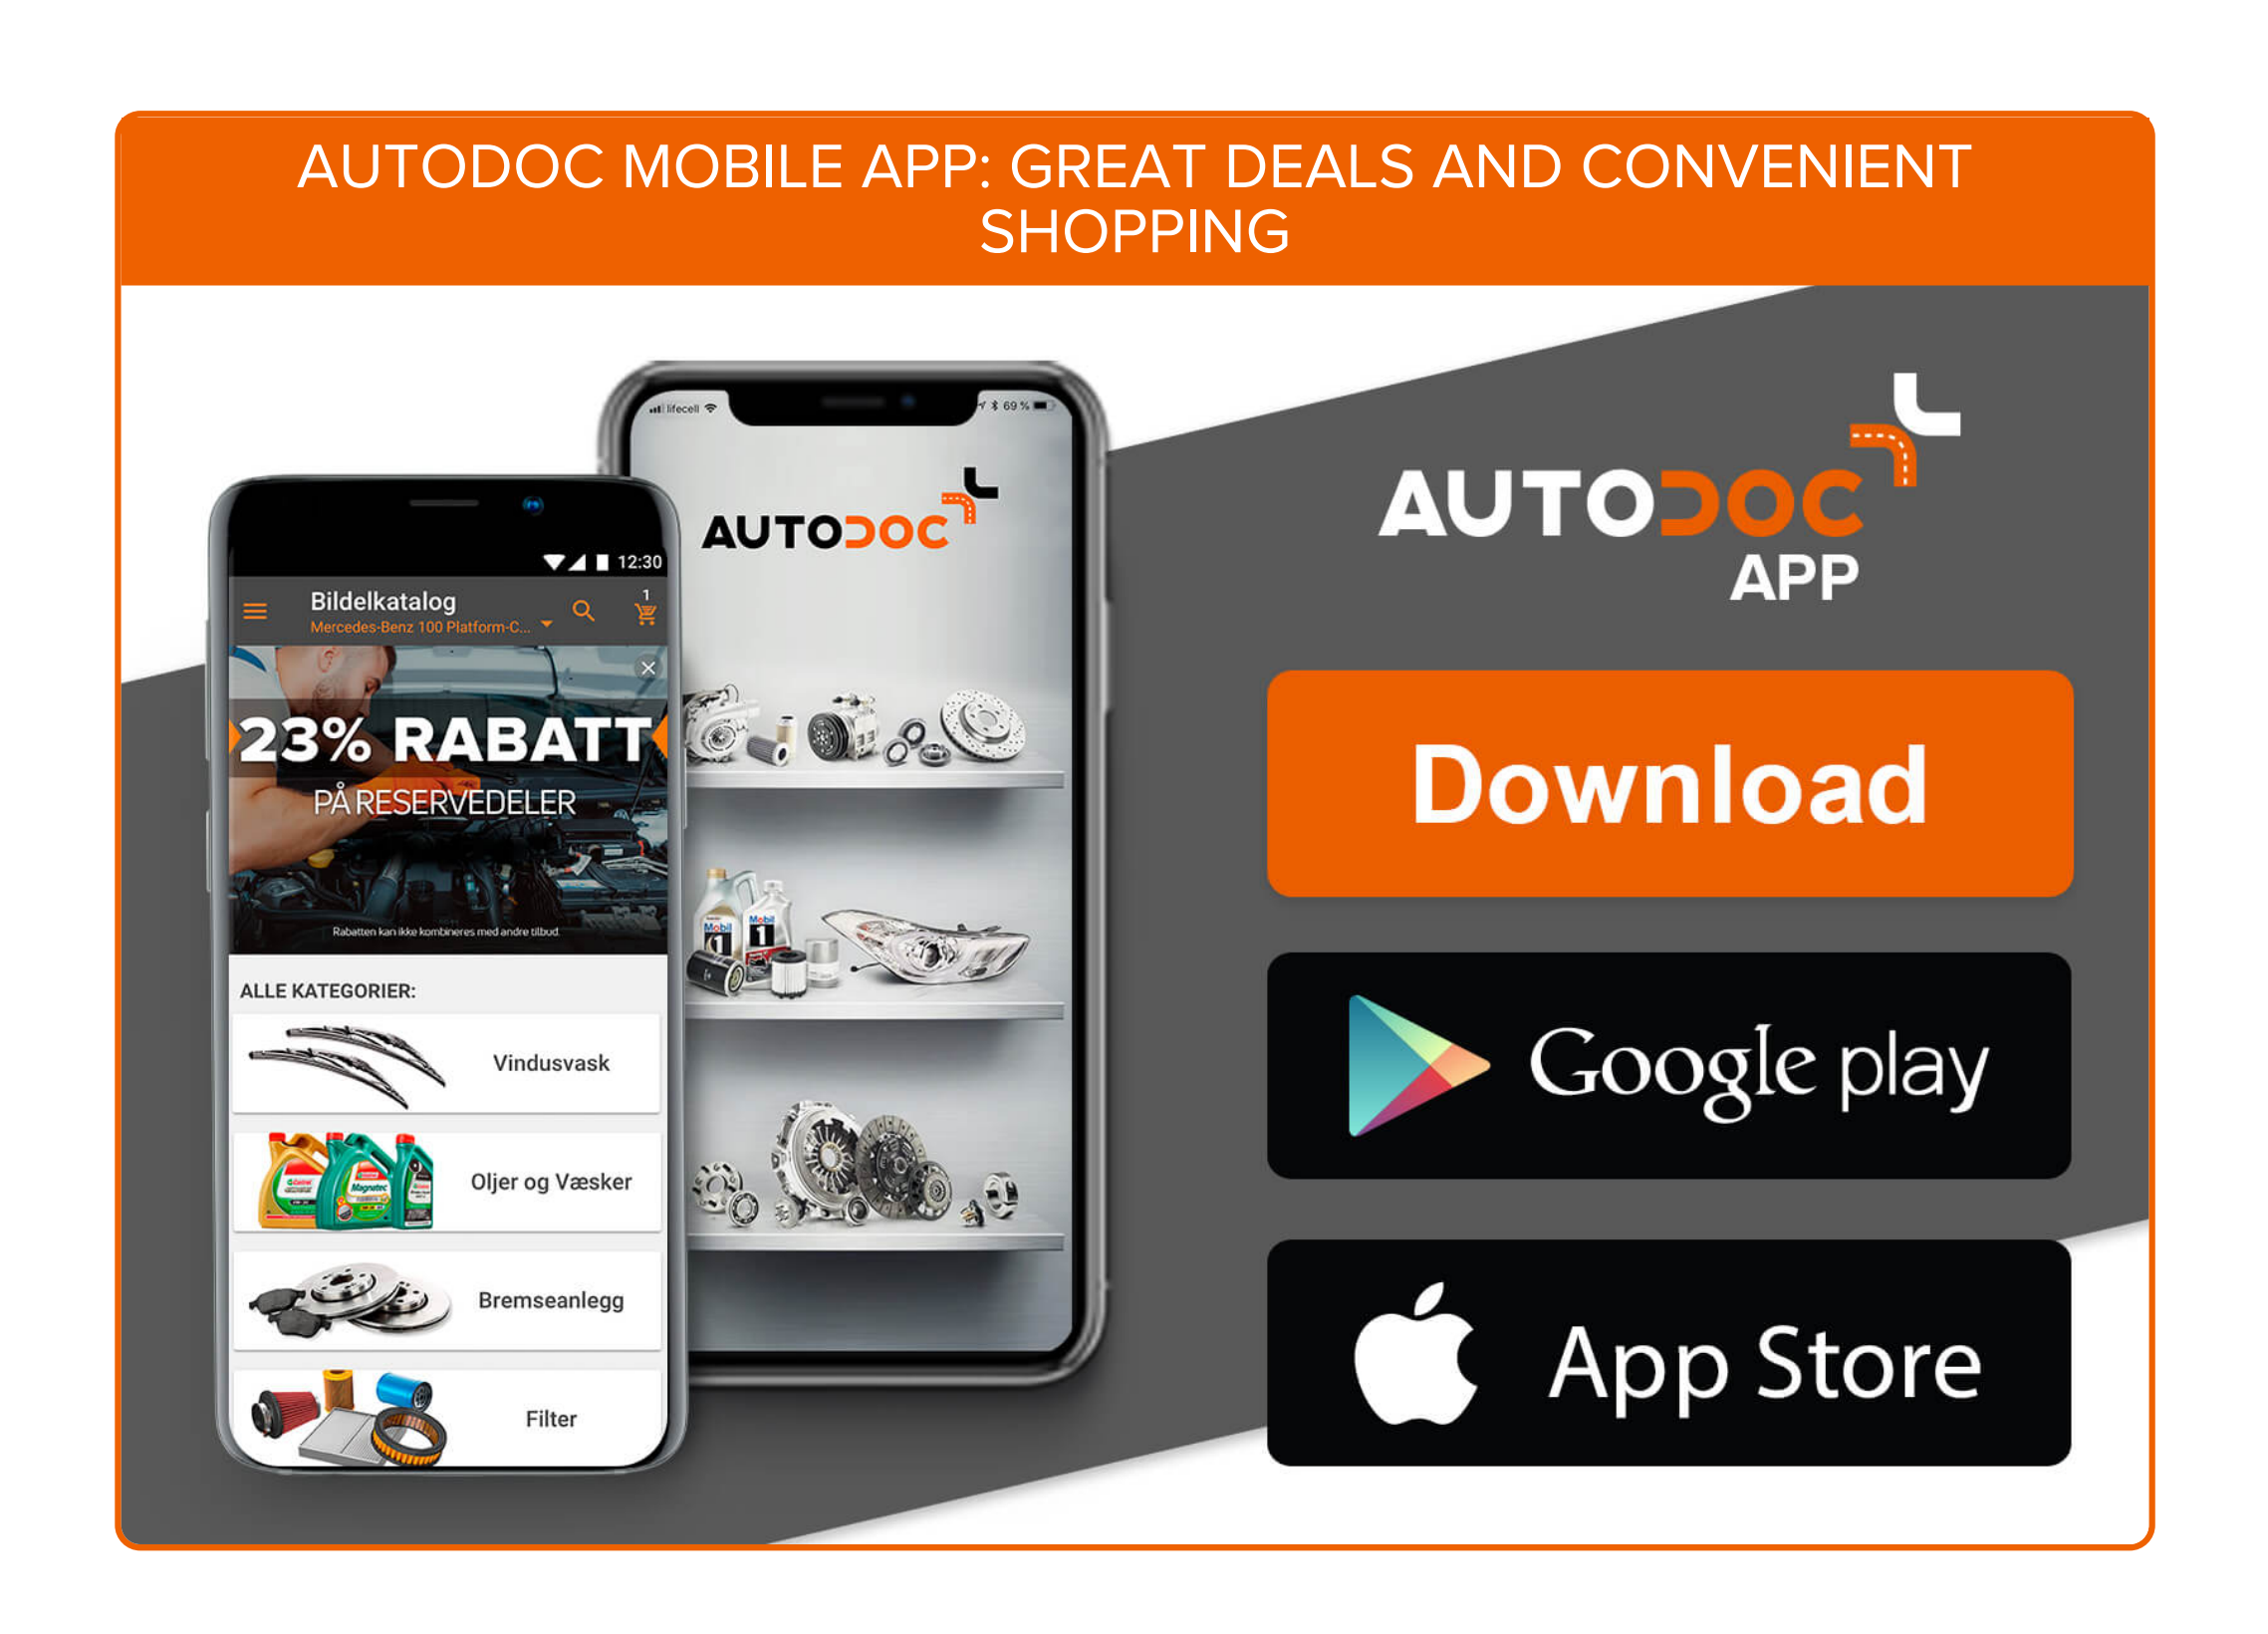

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR




CHOOSE CAR PARTS FOR VW GOLF 5
GOLF V


OIL FILTER FOR VW: BUY NOW



OIL FILTER FOR VW GOLF 5: THE BEST DEALS & OFFERS



Disclaimer: